


Crosses & Tees

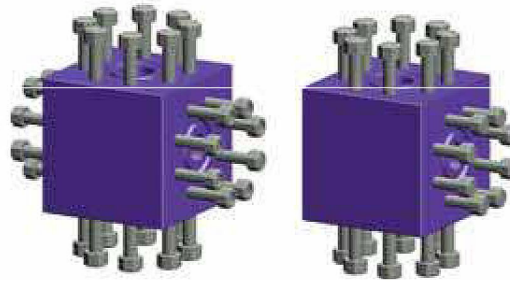

Cross & Tee Specifications

Run Size (inches)	Working Pressure (psi)	Outlet Size (inches)	Working Pressure (psi)
2-1/16"	2,000	2-1/16"	2,000
2-1/16"	5,000	2-1/16"	2,000
2-9/16"	2,000	2-1/16"	2,000
2-9/16"	5,000	2-1/16"	2,000
3-1/8"	2,000	2-1/16"	2,000
3-1/8"	3,000	2-1/16"	5,000
3-1/8"	3,000	3-1/8"	3,000
3-1/8"	5,000	2-1/16"	5,000
3-1/8"	5,000	3-1/8"	5,000
4-1/16"	2,000	2-1/16"	2,000
4-1/16"	2,000	4-1/16"	2,000
4-1/16"	3,000	2-1/16"	5,000
4-1/16"	3,000	4-1/16"	3,000
4-1/16"	5,000	2-1/16"	5,000
4-1/16"	5,000	2-9/16"	5,000
4-1/16"	5,000	3-1/8"	5,000
4-1/16"	5,000	4-1/16"	5,000
1-13/16"	10,000	1-13/16"	10,000
1-13/16"	15,000	1-13/16"	15,000
2-1/16"	10,000	1-13/16"	10,000
2-1/16"	10,000	2-1/16"	10,000
2-1/16"	15,000	1-13/16"	15,000
2-1/16"	15,000	2-1/16"	15,000
2-9/16"	10,000	1-13/16"	10,000
2-9/16"	10,000	2-1/16"	10,000
2-9/16"	10,000	2-9/16"	10,000
2-9/16"	15,000	1-13/16"	15,000
2-9/16"	15,000	2-1/16"	15,000
2-9/16"	15,000	2-9/16"	15,000
3-1/16"	10,000	2-1/16"	10,000
3-1/16"	10,000	2-9/16"	10,000
3-1/16"	10,000	3-1/16"	10,000
4-1/16"	10,000	2-1/16"	10,000
4-1/16"	10,000	3-1/16"	10,000
4-1/16"	10,000	4-1/16"	10,000